




ENDLESS BELT COATING
MATERIALS AND
FRICTION LININGS



MSC-130.07-E-04.07

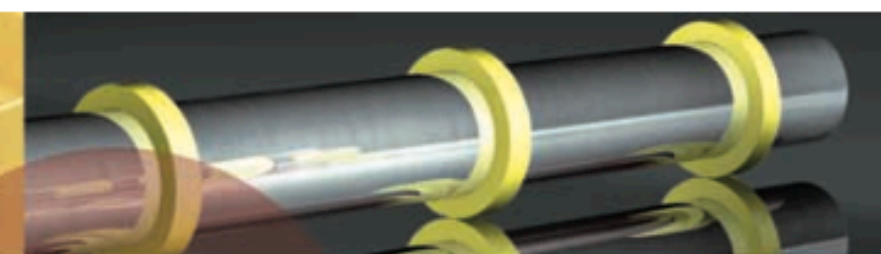

瑞峯貿易股份有限公司 台北總公司

台灣台北縣三重市興德路 82 號 13 樓

Tel: +886.2.8511.0778

Fax: +886.2.8511.0876(7)

瑞峯貿易股份有限公司 台中分公司

台灣台中市西屯區大安西街 2 號

Tel: +886.4.2310.0488

Fax: +886.4.2310.2488

立峰(上海)商貿有限公司 上海分公司

上海市徐匯區宜山路 889 號 4 號樓

5 樓 D 單元 (齊來科技服務園區)

Tel: +8621.6485.1772

Tel: +8621.6121.3052 (53) (55)

Fax: +8621.6485.1702

www.GOSUIHONG.com

Drive Belts

Conveyor Belts

Weighing Belts

Machine Belts

Process Belts

Vacuum Belts

Vacuum Timing Belts

Thermo Belts

Special Belts

Food Belts

Belt Coating Materials

Schlatterer Esband - matches exactly your specific requirements

Excellent traction combined with low abrasion are convincing arguments for Endless Schlatterer belts and friction linings.

Without any joint or splice they demonstrate their reliability and durability in each and every situation.








Our friction linings need not be joined on the machine as they can be mounted quickly and cost-effectively using their inherent tension.

You are welcome to request a sample.

Standard types and sizes are usually available ex stock.

Standard types and sizes (please refer to the list opposite) of our high-performance drive belts are usually available from stock.

Endless Belt Coating Materials
and Friction Linings

	ESBAND designation		hardness	abrasion resistance	antistatic	permissible operating temperature*	coefficient of friction** [μ ± 0.1 μ]		standard production dimensions for endless coating***			standard tolerances***		properties	
	coating	colour					steel	paper	length [mm]	width [mm]	thickness [mm]	width	thickness	applications	
	PU polyurethane	yellow, grey	55 ± 7 ShA	good	no	-10° to +60° C	0.4	0.8	PU timing belts up to 6400 NE timing belts up to 2000	up to 300	1.0 to 8	up to 50 mm ± 0.5 mm up to 100 mm ± 1.0 mm > 100 mm ± 2.0 mm	± 0.10 mm	■ especially suitable as friction linings ■ general applications ■ good traction ■ e. g. for feeder belts and vacuum application	
	PU soft polyurethane	yellow	30 ± 7 ShA	medium	no	-10° to +60° C	0.4	0.8	PU timing belts up to 6400 NE timing belts up to 2000	up to 300	1.0 to 8	up to 50 mm ± 0.5 mm up to 100 mm ± 1.0 mm > 100 mm ± 2.0 mm	± 0.10 mm	■ good shock absorbing properties ■ high elasticity	
	PU hard polyurethane	grey, red	70 ± 7 ShA	very good	no	-10° to +60° C	0.4	0.8	PU timing belts up to 6400 NE timing belts up to 2000	up to 300	1.0 to 8	up to 50 mm ± 0.5 mm up to 100 mm ± 1.0 mm > 100 mm ± 2.0 mm	± 0.10 mm	■ higher resistance to abrasion than standard PU	
	NE CR-rubber	black	75 ± 5 ShA	medium	yes	-20° to +100° C	0.5	0.8	600 to 800 800 to 2000	up to 150 up to 300	1.5 to 3.0 2.0 to 5.0	up to 50 mm ± 0.5 mm up to 100 mm ± 1.0 mm > 100 mm ± 2.0 mm	± 0.10 mm	■ especially suitable as friction linings ■ good bending elasticity	
	NBR nitrile rubber	blue, grey	75 ± 5 ShA	good	no	-20° to +100° C	0.4	0.8	600 to 800 800 to 2000	up to 150 up to 300	1.5 to 3.0 2.0 to 5.0	up to 50 mm ± 0.5 mm up to 100 mm ± 1.0 mm > 100 mm ± 2.0 mm	± 0.10 mm	■ especially suitable as friction linings ■ very good resistance to oils and greases	
	XNBR nitrile rubber	light beige	75 ± 5 ShA	extremely good	no	-20° to +130° C	0.3	0.6	600 to 800 800 to 2000	up to 150 up to 300	1.5 to 3.0 2.0 to 5.0	up to 50 mm ± 0.5 mm up to 100 mm ± 1.0 mm > 100 mm ± 2.0 mm	± 0.10 mm	■ very good resistance to oils and grease	
	EPDM EP-rubber	green	60 ± 5 ShA	good	no	-40° to +120° C	0.9	0.9	600 to 800 800 to 2000	up to 150 up to 300	1.5 to 3.0 2.0 to 50	up to 50 mm ± 0.5 mm up to 100 mm ± 1.0 mm > 100 mm ± 2.0 mm	± 0.10 mm	■ very good weathering resistance ■ components FDA compliant ■ very good resistance to acid and alkaline solutions	
	NK natural rubber	red	40 ± 5 ShA	medium	no	-10° to +50° C	0.8	0.8	600 to 800 800 to 2000	up to 150 up to 300	2.0 to 12.0	up to 50 mm ± 0.5 mm up to 100 mm ± 1.0 mm > 100 mm ± 2.0 mm	± 0.10 mm	■ especially suitable as friction linings ■ good shock absorbing properties ■ high elasticity ■ very good traction	
	NK natural rubber	maroon	50 ± 5 ShA	medium	no	-10° to +50° C	0.8	0.8	600 to 800 800 to 2000	up to 150 up to 300	2.0 to 12.0	up to 50 mm ± 0.5 mm up to 100 mm ± 1.0 mm > 100 mm ± 2.0 mm	± 0.10 mm	■ good shock absorbing properties ■ high elasticity ■ very good traction	
	SI silicone	white, blue, grey	30 ± 5 ShA	low	no	-20° to +100° C	0.4	0.6	300 to 7000	up to 200	1.5 to 6.0	up to 50 mm ± 0.5 mm up to 100 mm ± 1.0 mm > 100 mm ± 2.0 mm	± 0.10 mm	■ FDA compliant ■ dirt-resistant ■ glue-resistant	

All information in this brochure correspond to the current state of technology. Changes may be made without prior notification.

The values mentioned are for information only and do not guarantee a certain property.

* coating of timing belts
max. 80°C

** further information
upon request

*** special dimensions and tolerances
available on request